

Alvea. Your future, our view.

The distinctive feature of our Smart Retail approach is the seamless integration between the digital world and the physical experience.

The boundaries between online and offline dissolve, allowing customers to explore, discover, and purchase products in an engaging and informative context. ALVEA is committed to providing a fully personalized experience.

Thanks to technology and data analysis, we can offer customers targeted suggestions and answers to their questions even before they are asked.

Our experts, always present in-store, will provide detailed information to guide customers in discovering all aspects of each individual product.



Interior wooden doors



Windows



Shading systems



Flooring and wall coverings

alvea
YOUR FUTURE OUR VIEW

alvea stores

MILAN

TURIN

ROME

FLORENCE

NAPLES

DOHA


DUBAI

RIYADH


alvea.it - info@alvea.it



lif and slide line

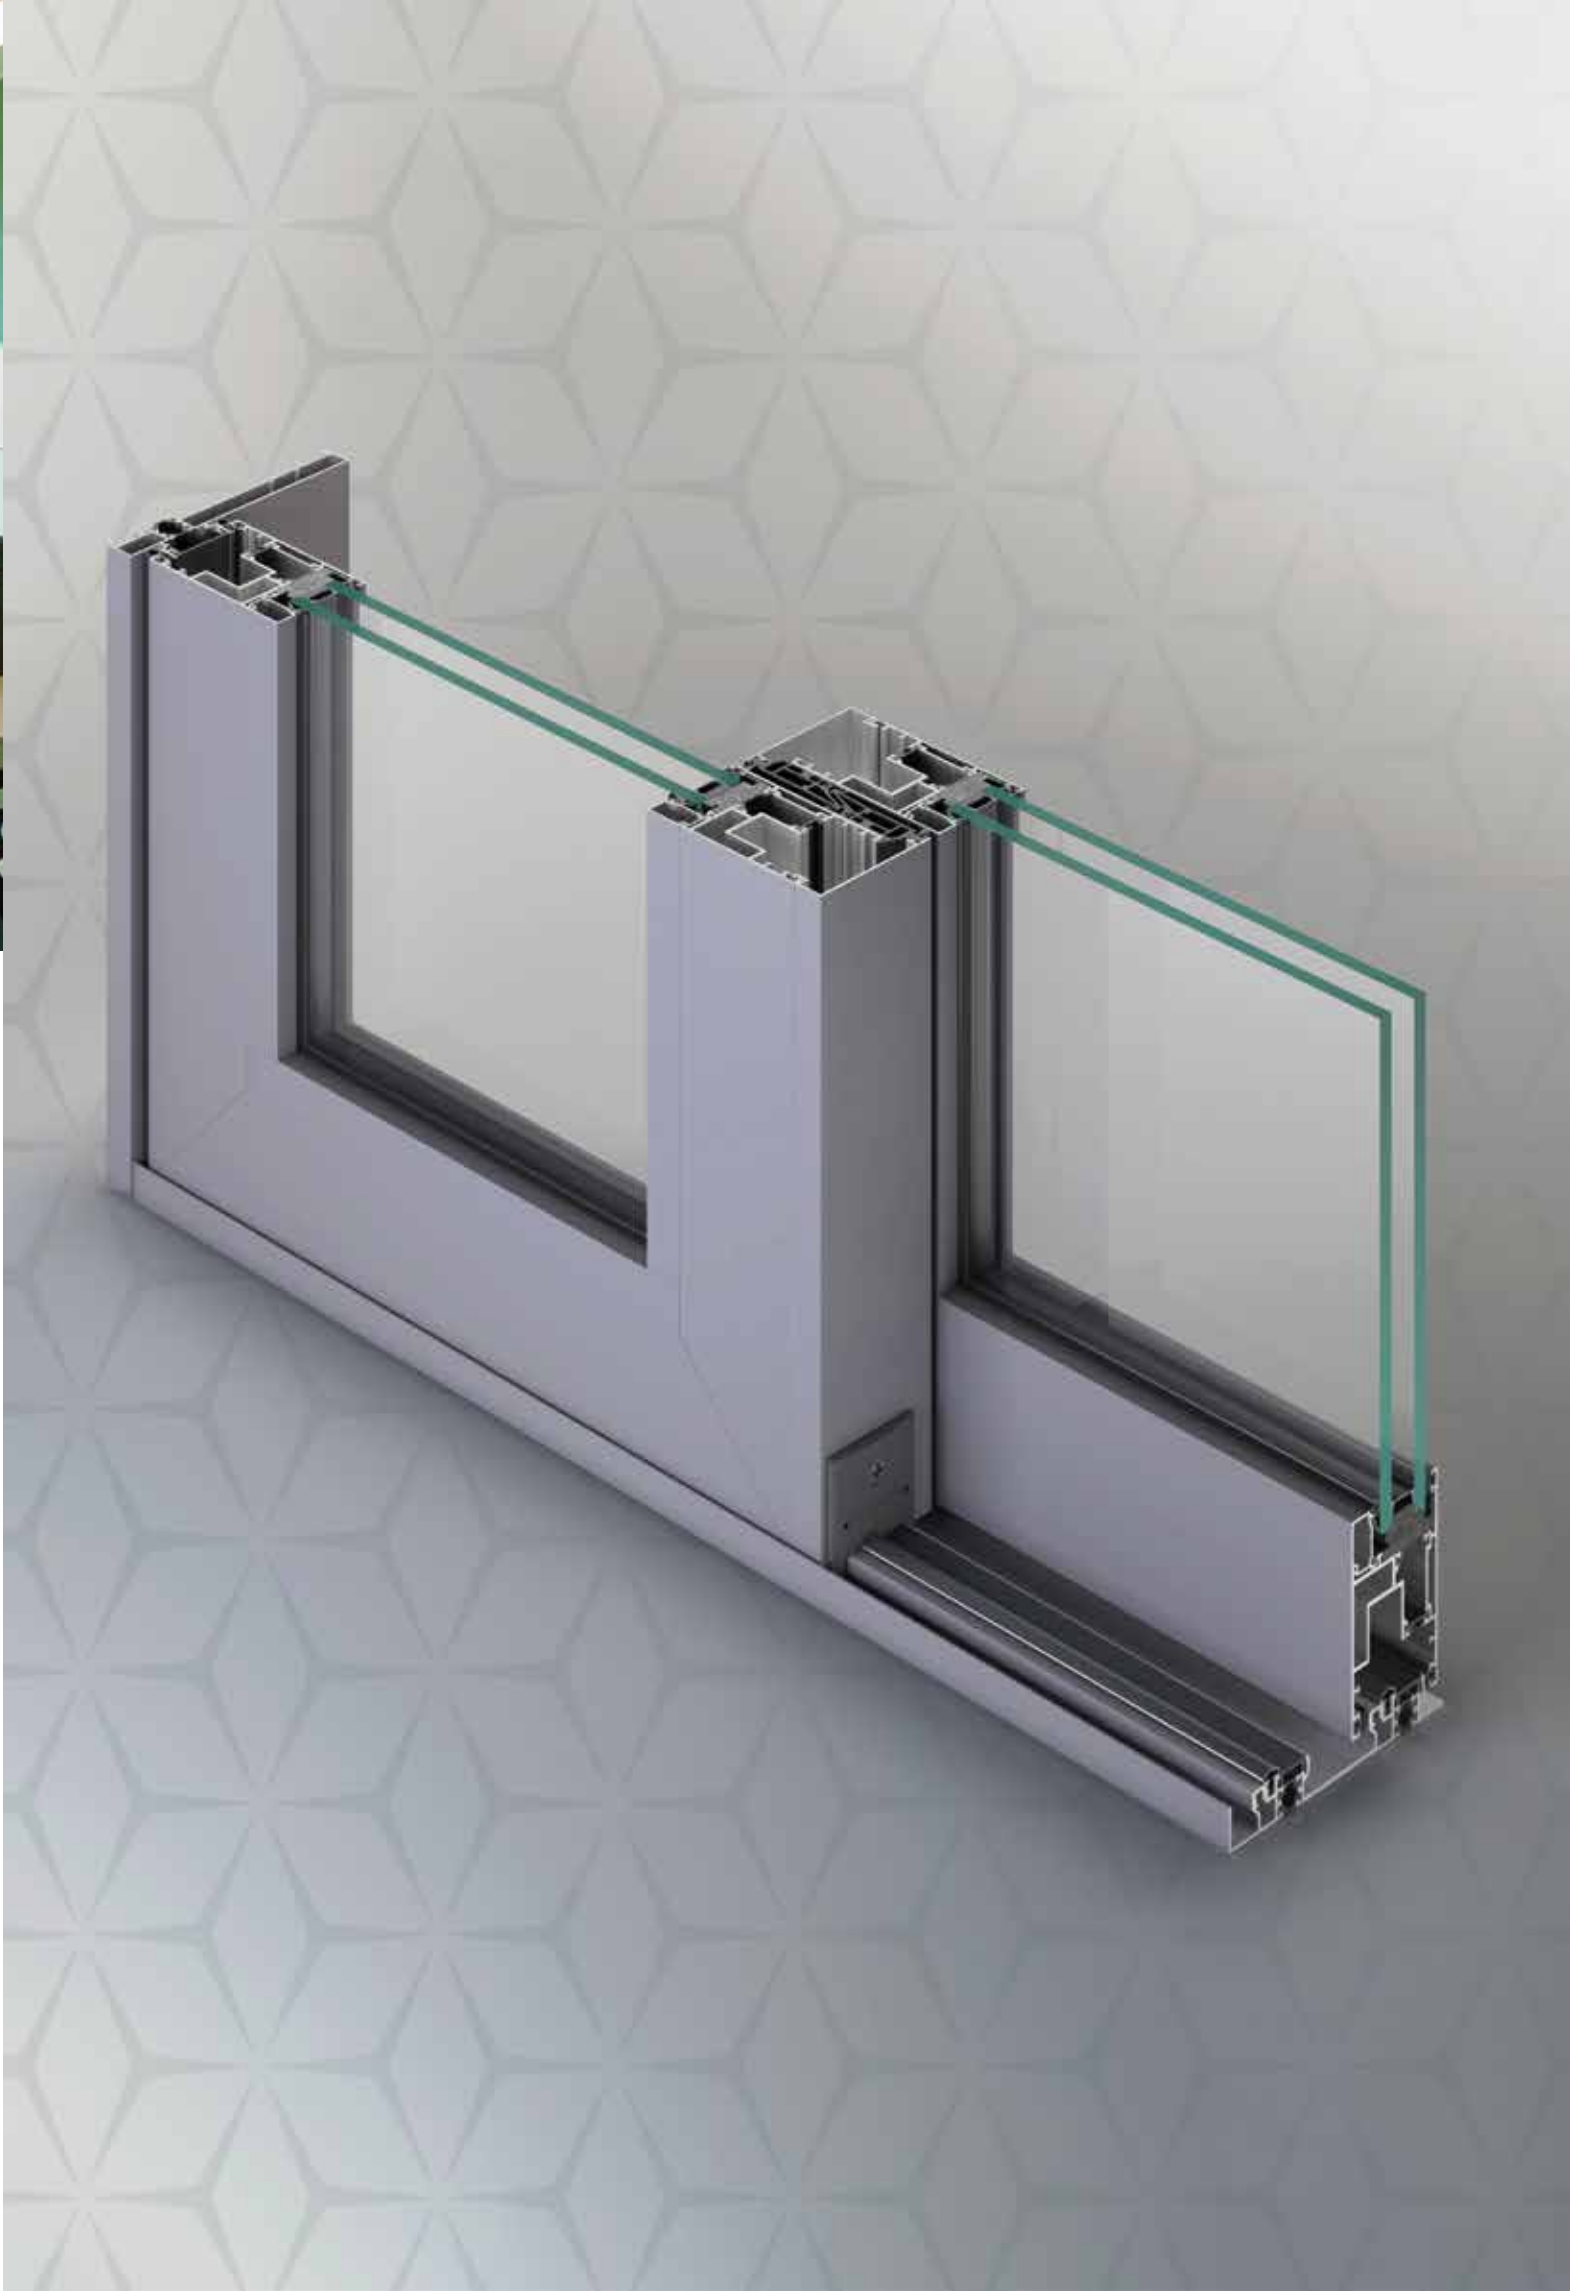

NC-S 120 STH




Telaio fisso Frame	Telaio mobile Sash	Spessore vetri Glass thickness	Peso massimo anta Maximum sash weight
Linea Europa: 115 mm Linea Montreal: 120 mm	45 mm	da 21 mm a 30 mm	200 kg

Trasmittanza termica
Thermal transmittance

Valore Uf 2,7-3,9 W/m² K / Uf value 2,7-3,9 W/m² K
(Finestra 3000x2700 mm; Vetro Ug 1 W/m² K, Psi 0,036 W/m² K)
(If casement window 3000x2700 mm; glass Ug 1 W/m² K, Psi 0,036 W/m² K)

NC-S 150 STH HES




Telaio fisso Frame	Telaio mobile Sash	Spessore vetri Glass thickness	Peso massimo anta Maximum sash weight
150 mm	60 mm	da 13 mm a 46 mm	350 kg o 600 kg

Trasmittanza termica
Thermal transmittance

Valore Uf 2-3,3 W/m² K / Uf value 2-3,3 W/m² K
(Finestra 3000x2700 mm; Vetro Ug 0,6 W/m² K, Psi 0,031 W/m² K)
(If casement window 3000x2700 mm; glass Ug 0,6 W/m² K, Psi 0,031 W/m² K)

NC-S 170 STH HES



Telaio fisso Frame	Telaio mobile Sash	Spessore vetri Glass thickness	Peso massimo anta Maximum sash weight
170 mm	70 mm	da 26 mm a 48 mm	350 kg o 600 kg

Trasmittanza termica
Thermal transmittance

Valore Uf 1,6-3,4 W/m² K / Uf value 1,6-3,4 W/m² K
(Finestra 3000x2700 mm; Vetro Ug 0,6 W/m² K, Psi 0,031 W/m² K)
(If casement window 3000x2700 mm; glass Ug 0,6 W/m² K, Psi 0,031 W/m² K)



Lifting-sliding for large dimensions



Lifting-sliding for large dimensions

No Limit:

In terms of design and maximum comfort.
ALVEA large lift-and-slide line provides the best solution for openings with non-standard sizes.

High Performance:

The large lift-and-slide sliding line is designed to make the most of the brightness and ensures high performance in terms of thermal and acoustic insulation and safety.